



How to wire Kleinn Lighted Rocker Switch (P/Ns 321A, 321B, 321G, 321R & 321W)

“KLEINN” logo illuminated schematic

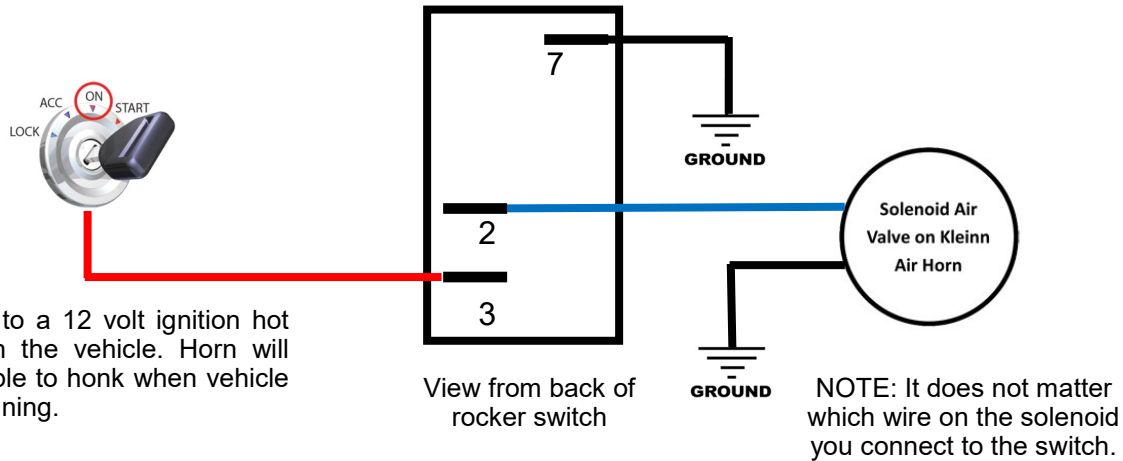

Connect to a 12 volt ignition hot circuit on the vehicle. Horn will not be able to honk when vehicle is not running.

“AIR HORN” illuminated schematic

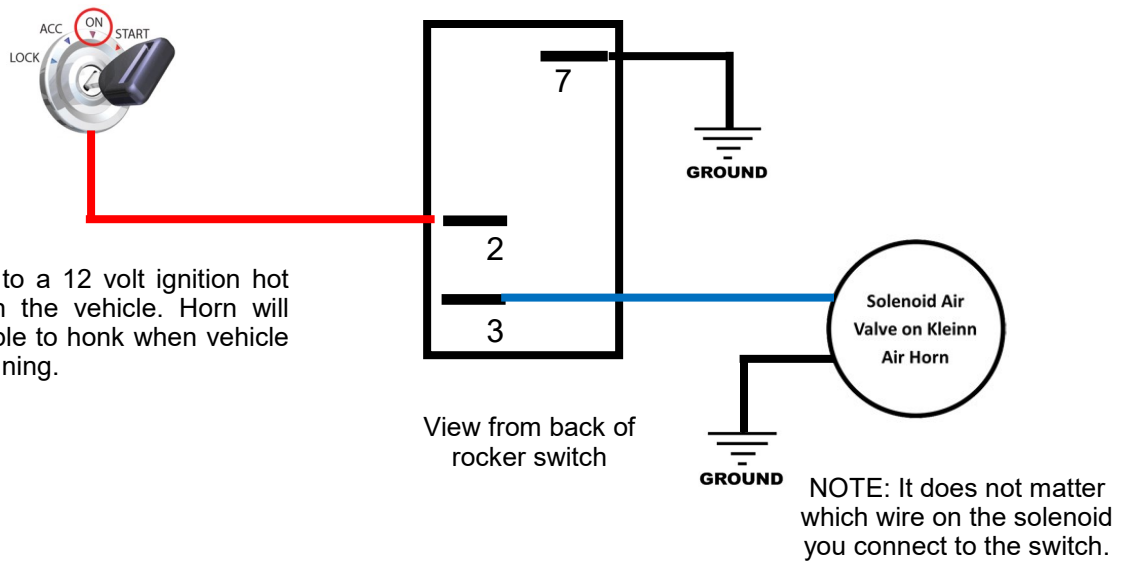

Connect to a 12 volt ignition hot circuit on the vehicle. Horn will not be able to honk when vehicle is not running.

**TOO LOUD?
TOO BAD.™**